


Buck - Adjustable Downlight

BUC-DLE

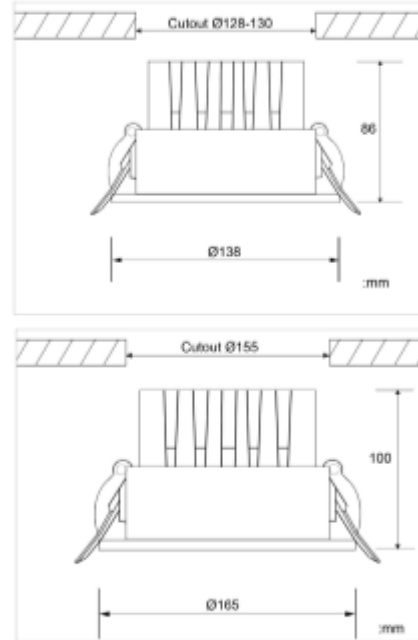

Product description

UGR <19 Adjustable LED Downlight

2700K/3000K/3500K/4000K

Beam angle 15/24/36/60 degree

Indoor lighting

Mounting type

Recessed Downlight

Technical data
Model number: BUC-DLE
Load wattage: 20w, 30w
Input voltage: 220~240V~50/60Hz
Power factor: >0.90
Beam angle: 15°24°36°60°
Lumens per watt: 90lm
Color temperature: 2700K/3000K/3500K/4000K
Colour rendition index: CRI ≥90 or CRI>95
Cut out: 130mm(20w), 155mm(30w)
Main materials: aluminum
CRI: 90
Color finishing: white/Black
Working temperature: (-20~40 °C)
Storage temperature: (-20~80 °C)
Lifespan: 50000 hrs
Certificates: CE-EMC, CE-LVD
Warranty: 5 years
Test report: IES file/ spectrum chart

All technical data is subject to industry-standard tolerances.

Contact: info@bilalighting.au